

MR-750TM Loading Ramp Purchasing Guide

Inside this Guide:

The Top 3 Reasons why the MR-750TM Ramp is a great choice for your box truck!









www.superboxtruckramps.com

The Top 3 Reasons why the MR-750[™] Ramp is a great choice for your box truck!



1. Fast, Safe, and Easy

The MR-750TM loading ramp for box trucks makes loading lawn equipment, tools or cargo *fast*, *safe* and easy.



2. One Person Operation

The spring-loaded, folding design of the MR-750TM loading ramp allows *anyone* to *quickly* raise and lower the ramp.



3. Strong and Wide

Install two MR-750TM loading ramps side-by-side for a **1500** lb. weight rating and up to an 8 ft. wide ramp platform.



3 Ways to Save on Shipping Cost!

- $\boldsymbol{1}$) Ship to a commercial address and have a loading dock or forklift available to unload the ramp pallet, OR
 - $\mathbf{2}$ Pick up the ramp at the nearest FedEx Freight location, OR
- Come pick up the ramp at our shop: 1610 Peach Parkway, Fort Valley, GA 31030

Measuring Your Box Truck to Ensure the Best Fit for Your MR-750TM Ramps!

Please provide the following measurements and information so that we can help you select the best fitting ramps for your box truck! For additional instructions, watch the measurement guide videos at: https://superboxtruckramps.com/faq

- 1. Measure the interior door opening width
- 2. Measure the height from the ground to the top of the floor of the truck (cannot exceed 40")
- 3. Are the tail/reverse/brake lights on the back of your truck under the body?
 - If your rear lights are on the vertical door frame post, measure from the top of the floor to the bottom of the light assembly (3A) and from the top of the floor to the top of the light assembly (3B).
- 4. Are there any grab handles on the rear of your truck?
 - If there are, measure from the top of the floor to the bottom of the grab handle (4A) and from the top of the floor to the top of the grab handle (4B).
- 5. Measure your Outpost. (interior door opening to outside of box)

inches

inches

YFS	NO	

inches	to	bott	om	(3A
inches	to	top	(3B)	

YES	NO	
VE		
	INU	


 inches t	o bott	om (4	Α
inches t	o ton	(4R)	

exact inches (5A)

Recommended MR-750[™] Ramp Sizes Based on Interior Door Width

Interior Door Width	Recommended Ramp Size
82" – 84"	1 set (left and right side) of 39.5" ramps
85" – 87"	One 39.5" ramp AND one 43.5"
03 07	ramp
88" – 90"	1 set (left and right side) of 43.5"
00 30	ramps
91" – 97"	Custom Set Needed
Less than 82"	Custom Set Needed

Please note: MR-750[™] Ramps are NOT intended for use with 3-wheeled mowers or machinery.

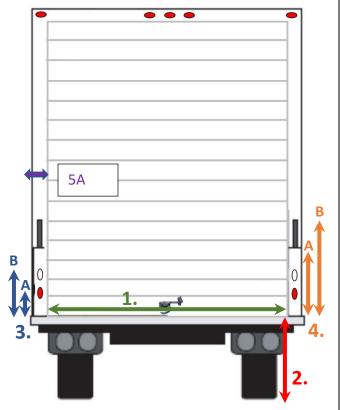

www.superboxtruckramps.com

Complete this page to receive your custom MR-750[™] Ramp and shipping quote!

Please note: All ramps are built and shipped on a first come, first serve pre-pay basis. You can pay online, by phone or through this form to order your ramps!

Name:		
Company Name:		
Full Shipping Address:		
City:		
Country:	Do you have a forklift	t or loading dock? Y N
Phone:	Fax:	
E-mail:		
Master Card Visa	American Express _	Discover
Credit Card #:		
Expiration Date:		
Signature		Date:
Billing Address (if different from shipping	address):	
City:	State:	Postal Code:
Country:	-	
Providing this information gives your permission for Super fax and phone. By not specifying a credit card, y	, -	-

Please e-mail or fax pages 2 and 3 *along with a picture of the back of your box truck* to sales@superlawntrucks.com or 478-822-9707. Feel free to contact us at 866-923-0027 with any questions. We look forward to building your MR-750TM Loading Ramps!